


Air Terminal Base, Ridge Mount, Imperial Thread



- For use on ridged roof
- Can be easily formed to accommodate a variety of angles
- Positive single bolt tension for multi-directional cable clamping

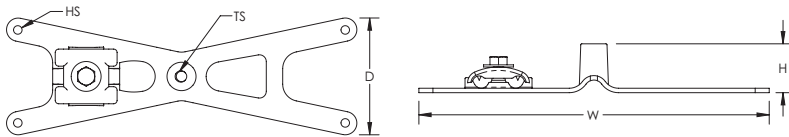

Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

Part Number	Thread Size TS	Depth D	Height H	Width W	Hole Size HS	Unit Weight
Material: Aluminum						
LPA34512	1/2 UNC	87.63 mm	38.1 mm	260.35 mm	6.6 mm	0.177 kg
LPA34558	5/8 UNC	87.63 mm	38.1 mm	260.35 mm	6.6 mm	0.177 kg
Material: Copper						
LPC34538	3/8 UNC	87.63 mm	38.1 mm	260.35 mm	6.6 mm	0.615 kg
LPC34512	1/2 UNC	87.63 mm	38.1 mm	260.35 mm	6.6 mm	0.615 kg
LPC34558	5/8 UNC	87.63 mm	38.1 mm	260.35 mm	6.6 mm	0.615 kg
Material: Copper – Finish: Tinned						
LPC345L38	3/8 UNC	87.63 mm	38.1 mm	260.35 mm	6.6 mm	0.615 kg
LPC345L12	1/2 UNC	87.63 mm	38.1 mm	260.35 mm	6.6 mm	0.615 kg
LPC345L58	5/8 UNC	87.63 mm	38.1 mm	260.35 mm	6.6 mm	0.615 kg

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright © 2015 ERICO International Corporation. All rights reserved.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

