


Air Terminal Base, Stamped Narrow, Imperial Thread



- For use on narrow flat surfaces
- Positive single bolt tension for multi-directional cable clamping

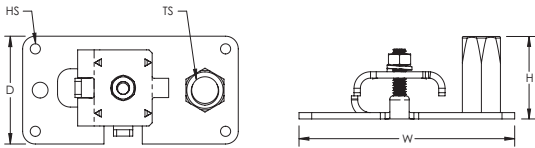

Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

Part Number	Thread Size TS	Hole Size HS	Depth D	Height H	Width W	Unit Weight
Material: Aluminum						
LPA30412	1/2 UNC	5 mm	54 mm	42 mm	108 mm	0.045 kg
LPA30458	5/8 UNC	5 mm	54 mm	42 mm	108 mm	0.045 kg
Material: Copper						
LPC30438	3/8 UNC	5 mm	54 mm	42 mm	108 mm	0.113 kg
LPC30412	1/2 UNC	5 mm	54 mm	42 mm	108 mm	0.113 kg
LPC30458	5/8 UNC	5 mm	54 mm	42 mm	108 mm	0.113 kg
Material: Copper – Finish: Tinned						
LPC304L38	3/8 UNC	5 mm	54 mm	42 mm	108 mm	0.113 kg
LPC304L12	1/2 UNC	5 mm	54 mm	42 mm	108 mm	0.113 kg
LPC304L58	5/8 UNC	5 mm	54 mm	42 mm	108 mm	0.113 kg

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright © 2015 ERICO International Corporation. All rights reserved.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

