



Air Terminal Base, Stamped Ridge Mount, Imperial Thread



- For use on ridged roofs
- For positive bolt tension cable clamping

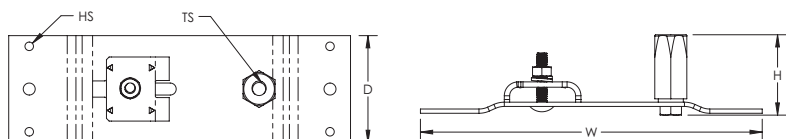

Conductor Size, UL: Class 1 - Class 2 (4/0 Max)

Part Number	Thread Size TS	Hole Size HS	Depth D	Height H	Width W	Unit Weight
Material: Aluminum						
LPA31212	1/2 UNC	5.08 mm	63.5 mm	43.82 mm	304.8 mm	0.181 kg
LPA31258	5/8 UNC	5.08 mm	63.5 mm	43.82 mm	304.8 mm	0.181 kg
LPA31512	1/2 UNC	5.08 mm	63.5 mm	43.82 mm	203.2 mm	0.158 kg
LPA31558	5/8 UNC	5.08 mm	63.5 mm	43.82 mm	203.2 mm	0.158 kg
Material: Copper						
LPC31212	1/2 UNC	5.08 mm	63.5 mm	43.82 mm	304.8 mm	0.433 kg
LPC31238	3/8 UNC	5.08 mm	63.5 mm	43.82 mm	304.8 mm	0.433 kg
LPC31258	5/8 UNC	5.08 mm	63.5 mm	43.82 mm	304.8 mm	0.433 kg
LPC31512	1/2 UNC	5.08 mm	63.5 mm	43.82 mm	203.2 mm	0.342 kg
LPC31538	3/8 UNC	5.08 mm	63.5 mm	43.82 mm	203.2 mm	0.342 kg
LPC31558	5/8 UNC	5.08 mm	63.5 mm	43.82 mm	203.2 mm	0.342 kg
Material: Copper – Finish: Tinned						
LPC312L12	1/2 UNC	5.08 mm	63.5 mm	43.82 mm	304.8 mm	0.433 kg
LPC312L38	3/8 UNC	5.08 mm	63.5 mm	43.82 mm	304.8 mm	0.433 kg
LPC315L12	1/2 UNC	5.08 mm	63.5 mm	43.82 mm	203.2 mm	0.342 kg

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright © 2015 ERICO International Corporation. All rights reserved.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

